on hol(~-

2. Press $($a and enter intercom number to add another internal person to your call OR press TALK and dial an external number.

3. Press e again to join all.

Note: At least one party must be an external call.

TOGGLE between an active call and a call on HOLD:

1. Press the TOGGLE soft key to swap between the calls.

Privacy On/Off
The Gigaset 2402 has a system setting for call privacy, conf igurable for each line.

If **Privacy is ON,** then idle mobiles are prevented from joining calls that are already in progress. The CONFERENCE feature must be used to create a three party call.

If **Privacy is OFF,** then an idle mobile can I . oin an external line call that is already in progress without having to conference. The idle mobile can join the call by pressing the JOIN 1-0 or 2) soft key for the active line.
A tone is presented to the active callers to advise that a third person (internal) has joined the call.

Directory
See directions under 2420 section.

Reference Guide
forthe
Gigaset 2400
Handset series

Guick Reference Guide for the Gigaset 2400 Series Handset

Display - Contains information about call status and user options

Starts new or ends

MENU existing menu EE)

Answers calls and initiates dial tone, with Call Waiting, toggles between an active and an incoming call

Access key for internal calls $($9

The following pages contain product specific information that will help you to quickly begin using your system. Take a moment to note the type of system you have purchased and look for information that pertains specifically to it. Detailed information

Menu keys & variable shown on

es a transfer or es a conference

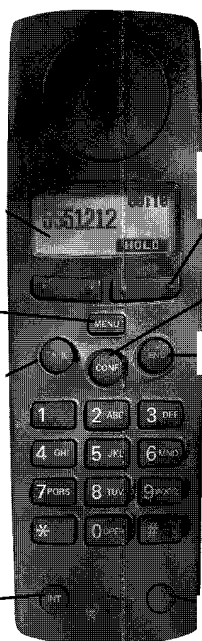Terminates calls arid completes a transfer

Keypad Numbers, Letters, * and # -6ials numbers and enters numbers, letters, formatting and punctuation, symbols, and spaces into the Directory

STurns cordless handset ON/OFF and initiates keyboard protect

about the system features, installation and use of the product is also contained in your System User Manual. Please read the Safety Instructions and Product Information before using the product.

Quick

2.4 GHz
next generation
beyond 900MHz

1~4-0 Basics:

Registering Extra Handsets
At the Desk Station select "Mobile Registration?"

2. Enter PIN (Default PIN is 0000),

   press 9B

At the Cordless Handset

1. Press (9
2. Press OK at the "Please Register" prompt
3. Enter PIN (Default PIN is 0000~
4.Choose intercom number, press OK

Making A Call
External Calls (Select line if prompted)
1. Dial number, press **TALK** or
2. Press **TALK** and dial number
Internal Calls

1. Press (9
2. Enter intercom number 1-8 or

3. Press K) to call all handsets, press 0 to call base

Accepting a Call
1. Press **TALK** (for call waiting press **TALK** to toggle between calls)

Transferring A Call
Transferring External Call

I. Press G

2. Press Q!9, choose intercom # 0-8 3. Press 8 If transferred call is not answered it returns to you after 30 seconds **Transferring Internal Call** 1.Press e 2. Press **TALK,** dial external number

3. Press E)
Confer nce Calls
1. Pres cc

2. Pres 7_{INT}, choose extension for internal conference or

3. Press **TALK,** dial external number

4. Press IS again
Directory
Creating New Entry

1. Press ail select "Directory"

2. Highlight "New Entry" and press OK

3. Enter the letter of the name by pressing the keypad key

4. Press > to move to the number line and enter the number

5. Press OK
6. Highlight "Save Entry" and press OK

Pressing the CK:) will capitalize the next
letter. Correct mistakes by pressing <---I .
To move up or down a line use > or < .

Using Your Directory
1. Press **DIRCTRY**
2. Press A and v to find the desired entry
3. Press OK to select

4.To dial selected entry press OK when "Dial Number" is highlighted, or you may edit the entry by highlighting "Edit Entry," and pressing OK.

Gigaset 2402
Basics:

Registering Extra Handsets
At the Base Controller:

1. Press and hold the lit button f or 4 to 30 seconds.

2.VVhen the button light begins to blink slowly, you have up to 90 seconds to register the handsets.

At the Cordless; Handset:

1 . Press 8 to turn on handset
2. Press OK at the " Please Register" prompt

3. Enter PIN (Default PIN is 0000)

4.Choose intercom number, press **OK**

Making a Call
External Calls (select a line if prompted)

1. Dial number, Press **TALK** or

2. Press **TALK** and dial number

Internal Calls

1. Press (9
2. Enter intercom number 1-8 from the list displayed by pressing the related keypad number. All registered mobiles on the system will be shown, listing intercom number and name.

3. Press **ALL INT** soft key or press K) to call all handsets.

1. Press **TALK** or related -1 or L2 soft key and begin speaking.

Note: The line number (1-1 or -2) for the
ringing line is displayed. If you have Caller
ID*, the caller's name and number will
also be displayed.

Call Handling - External Calls

END Call:

1. Press **S** or put the handset back in the charger

Put Call on HOLD:

1. Press **HOLD** soft key or press **6)** to place current caller on hold

Answer CALL WAI

1.When you hear the call waiting tone on the line, press **TALK** to answer the call waiting call.

TRANSFER the Call to Another Mobile:

Without Announcing It:

1. Press the **TRANSFR** soft key.

2. Enter intercom number.

Note: If the transferred call is not
answered within 30 seconds, the call will
return to you.

To Announce the Transfer:

1. Press **HOLD.**

2.Press Sthen enter the intercom number of the other mobile.

3.When answered, announce the call and then press the **TRANSFIR** soft key to complete the transfer.

*Bequires subscription from the telephone company